

Paging desk with zone selection

- ✓ VU meter indicator.
- ✓ 4 zone selection keys.
- ✓ Chime option.
- ✓ Two different pre-recorded chimes (2 or 4 tones).
- ✓ Microphone, chime and master volume controls.
- ✓ Daisy-chaining up to 1000 m.
- ✓ 24Vdc (power supply included).



### Description


PZ-400 is an addressable condenser paging desk, with until 4 different zone selectors and all-call key for a broadcast announcement.

The different LED indicators show the user the configuration of the paging desk: CHIME selection, zone/s selection, VU meter signal level and working status.

The MXA-400 allows until 4 paging desk in the same system with a FTP CAT-5 BUS connection between them. PZ-400 uses a bus to send data and audio, bringing durability, flexibility and easy interaction with the user.

### Technical characteristics


- Microphone:	Condenser microphone
- Sensitivity:	1 V / 600 Ω.
- Frequency range:	80Hz - 18Khz .
- Distortion (THD):	<1%.
- Power supply:	230VAC / 24VDC.
- Power consumption	10 W.
- Weight:	960 gr.

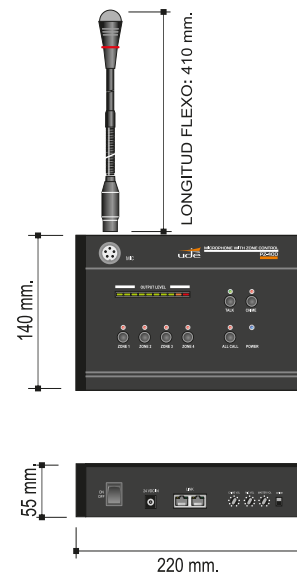


## Front panel



- 1** Microphone.
- 2** VU meter indicator.
- 3** Zone selection keys.
- 4** Talk button.
- 5** All-Call button.
- 6** POWER indicator.
- 7** CHIME selection key.

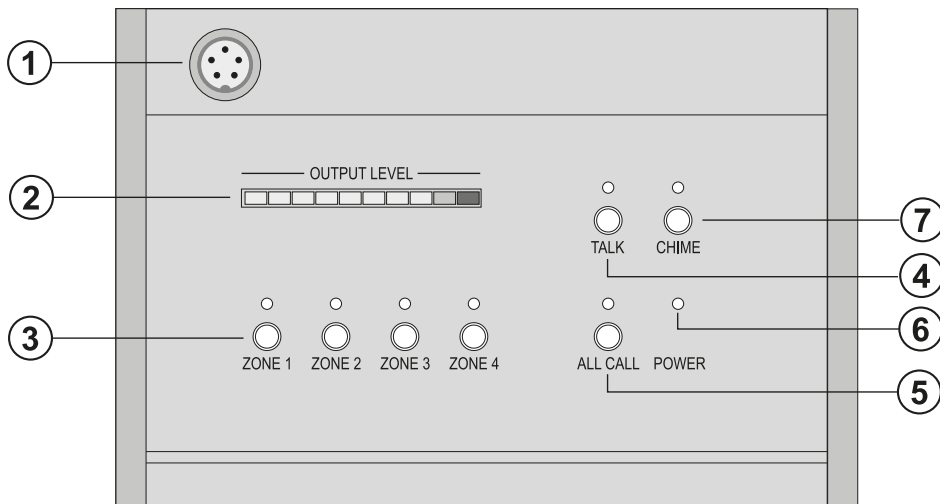

## Rear panel

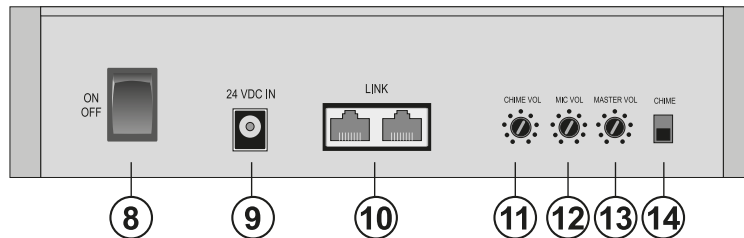

- 8** Power switch.
- 9** 24Vdc input.
- 10** BUS ports.
- 11** Chime volume control.
- 12** Microphone volume control.
- 13** Master volume control.
- 14** Chime selector (2 or 4 tones).